




Electricity Consumption Comparison




1. Comparison of 1.5 HP Inverter model and 1.5 HP No Inverter model (Cooling) Outside temperature: 35 °C / 24 °C. Remote setting temperature: 25 °C with Fan speed (High) Vertical Airflow direction: Auto. Horizontal Airflow direction: Front.

Total power consumption amount are measured for 8 hours from starting. At Panasonic Amenity Room (size: 16.6 m²) This is the maximum energy savings value, and the effect differs according to conditions in installation and usage.

Inverter technology exceptional energy-saving performance

Panasonic Inverter air conditioners are designed to give you exceptional energy savings and performance, whilst also ensuring you stay comfortable at all times. At the start up of an air conditioner's operation, powerful operation is required to reach the set temperature. After the set temperature is reached, less power is required to maintain it. A conventional non-Inverter air conditioner can only operate at a constant speed which is too powerful to maintain the set temperature. Thus, in attempting to achieve this, it switches the compressor ON and OFF repeatedly. This results in wider temperature fluctuations leading to wasteful consumption of energy. The Panasonic Inverter air conditioner varies the rotation speed of the compressor. This provides a highly precise method of maintaining the set temperature. Unlike a conventional non-Inverter air conditioner which consumes a lot of energy, Panasonic Inverter air conditioner reduces wasteful operation - giving you energy savings of up to 50%1 on cooling mode.

The advantages of inverter air conditioners. Comparing Inverter and non-Inverter air conditioners.

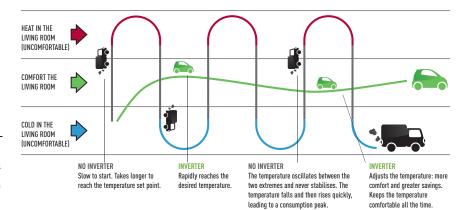

leading to a consumption peak

KIT-UE9-PKE // KIT-UE12-PKE

HEALTHY AIR

- · Odour-removing function
- · Anti-mould filter

ENERGY, EFFICIENCY AND ECOLOGY

- Inverter system
- · R410A refrigerant gas

EASE OF USE

- 12-hr timer
- · User friendly infrared remote control

COMFORT

- · Super Quiet mode
- · Powerful mode
- · Automatic vertical airflow control
- · Hot start mode
- · Automatic restart

EASY INSTALLATION AND MAINTENANCE

- Maximum connection distance 15 m
- · Removable, washable panel







CU-UE9PKE

Kit			KIT-UE9-PKE	KIT-UE12-PKE
			CS-UE9PKE	CS-UE12PKE
Outdoor			CU-UE9PKE	CU-UE12PKE
Cooling capacity	Nominal (Min - Max)	kW	2.50 (0.90-3.00)	3.50 (0.90-3.90)
cooting capacity	Nominal (Min - Max)	kCal/h	2,150 (770-2,580)	3,010 (770-3,350)
EER 1)	Nominal (Min - Max)		3.57 (4.74-3.00) A	3.47 (5.29-3.25) A
SEER	Nominal (Pill - Plax)		5.6 (4.74-5.00)	5.6 A
Pdesign (cooling)		2.5	3.5	
	Nominal (Min - Max)	kW	0.70 (0.19-1.00)	1.01 (0.17-1.2)
Annual electricity consumption		kWh	156	219
	Nominal (Min - Max)	kW	3.30 (0.90-3.90)	4.25 (0.90-4.90)
neating capacity	Nominal (Min - Max)	kCal/h	2,840 (770-3,350)	3,660 (770-4,210)
Heating capacity at -7°C	Nominal	kW	2.83	3.55
COP 1)	Nominal (Min - Max)		4.02 (5.29-3.39) A	
SCOP	Nominal (Mili - Max)		4.UZ (5.29-3.39) A	3.79 (6.00-3.35) 🗚
	Nominat	kW	2.5	3.4 A 3.2
Pdesign at -10 °C	N . 1(M: M)	kW		
	Nominal (Min - Max)		0.82 (0.17-1.15)	1.12 (0.15-1.46)
Annual electricity consumption (heating) ²⁾ KWh 1029 Indoor Unit			1029	1318
Power source V		230	230	
Recommended Fuse A		16	16	
Recommended power cable section mm ²		1.5	1.5	
		mm ²	4 x 1.5	4 x 1.5
	Cooling / Heating	A	3.3 / 3.8	4.7 / 5.2
Max. current		A	6.3	8.4
	Cooling / Heating	m³/h	750 / 666	750 / 750
Moisture removal volume I/h			1.4	2.0
Sound pressure Level 3	Cooling - Heating (Hi / Lo / S-Lo)		42 27 22 - 42 27 25	42 / 30 / 22 - 42 / 33 / 25
Sound power Level	Cooling / Heating (Hi)	dB	58 / 58	58 / 58
	H x W x D	mm	290 x 848 x 213	290 x 848 x 213
Net weight		kg	8	8
Outdoor Unit				
Air Volume		m³/h	1,902 / 1,842	1,956 / 1,896
Sound pressure Level 3)	Cooling (Hi) / Heating (Hi)	dB(A)	47 / 48	48 / 50
Sound power Level	Cooling (Hi) / Heating (Hi)	dB	63 / 64	64 / 66
	HxWxD	mm	540 x 780 x 289	540 x 780 x 289
		kg	23	26
	Liquid / Gas pipe	inch (mm)	1/4" (6.35) / 3/8" (9.52)	1/4" (6.35) / 3/8" (9.52)
Refrigerant Loading	R410A	kg	0.77	0.86
Elevation difference (in/out)	Max	m	10	10
Piping length	Min / Max	m	3-15	3-15
Precharge length	Max	m	7	7
		20	20	
	Cooling Min / Max	°C	+16 / +43	+16 / +43
. •	Heating Min / Max	°C	-10 / +24	-10 / +24
		/	ting Indeer 20 °C DD Heating Outdoor 7 °C DD / 4 °C WD (DD, Dr. Dulb, WD, Wet Dulb)	·

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb)

Connectivity restriction: JKE units are not compatible with PKE units.

1) EER and COP classification is at 230 V in accordance with EU directive 2002/31/EC. 2) The annual energy consumption is calculated in accordance with the ErP directive. 3) The Sound pressure level of the units shows the value measured of a position 1 meter in front of the main body and 0,8 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 4) Add 70 mm for piping port. Specifications subject to change without notice.
For detailed information about ErP, please visit our page http://www.doc.panasonic.de



Due to the organism and not be specifications of this caldidgue are needed braining bypographic errors, and may be subject to minor modifications by the manufacturen without prior warming in oder to improve the product. The total or partial errors are actually against errors, and may be subject to minor modifications by the manufacturen without prior warming in oder to improve the product. The total or products in of this caldingue are needed without the express author sistion of Parasamic UK Lid

Inverter System. The Inverter range provides greater efficiency, more comfort and less noise than classic air conditioners. The Inverter system provides more precise temperature control, and keeps the ambient temperature constant with lower energy consumption and a significant reduction in noise and vibration levels.



Powerful Mode. The rapid and effective powerful mode is ideal for when you come home on the hottest or coldest days. It works at maximum power to reach the desired temperature in 15 minutes.



Super Quiet Mode. Thanks to its latest generation compressor and its twin blade fan, our outdoor unit is one of the most silent on the market. The indoor unit emits an almost imperceptible 22 dB.



New Panasonic R2 Rotary Compressor. Designed to withstand extreme conditions. Panasonic Rotary delivers high performance, efficiency and reliable service, no matter where you are.



5 Years Warranty. We guarantee the compressors in the entire range for five years.

Panasonic

To find out how Panasonic cares for you, log on to: www.aircon.panasonic.eu

Contact Details: Telephone: 01344 853182 / www.panasonic.co.uk/aircon Address: Panasonic Air Conditioning: Panasonic House // Willoughby Road // Bracknell // Berkshire // RG12 8FP



ART-KLIMA Bieńkowski Sroczyński SpJ

Kasprzaka 25A 01-224 Warszawa 784680338, 604197998 www.art-klima.pl biuro@art-klima.pl